



# Nitto tape Hyperflash 6951

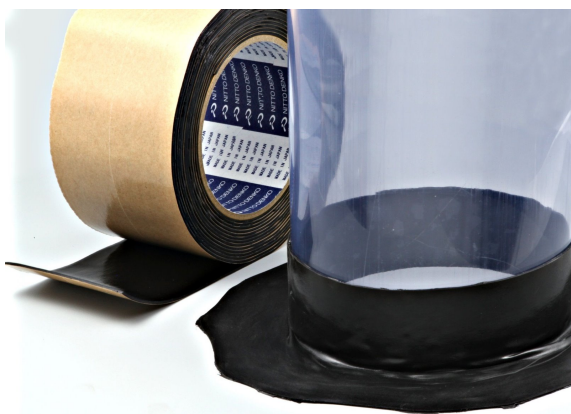

Excellent for applications in building and construction  
Formable sealing tape for air and watertight seals from difficult angles  
Stretch tape for a perfect seal around pipes and ducts

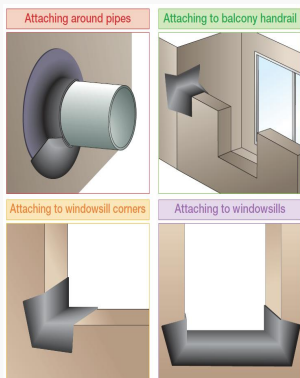

## Rasgos

- Material is extremely stretchy in all directions and deformable up to 580%
- Tape can be applied without the formation of seams and folds
- A permanent suture is secured by substantially high bond strength
- Adhesive provides an exceptional bond to wood, plastics, metal, glass and stone

## Especificaciones

Material	EPDM rubber
adhesive type	Butyl based
Total thickness	1,32mm
Tensile strength	9,8 N/10mm
Elongation at break	580%
Adhesion on multiplex	21,2 N/10mm
Storage humidity	40-75%

# Nitto tape Hyperflash 6951

## Más información

[Download: Installation instructions](#)

<http://www.filoform.nl/en/nitto-tape>

## Productos

Art.nr.	Product Naam	Dimensiones	Color	Unidad de embalaje
800485	Hyperflash 6951A, 75mm x 5m	75mm x 5m x 1,3mm	negro	18 pcs/carton