


Heavy wall shrink tube with adhesive

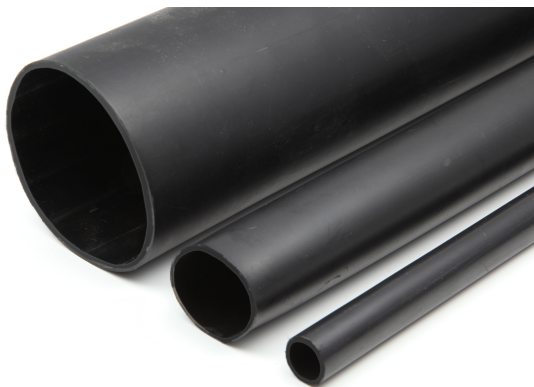

Cable joints and cable terminations
Cables till 1kV
Telecommunication
Indoor / Outdoor underground, above ground, under water, in cable ducts

Rasgos

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +90°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flexible
- Cadmium free and halogen free
- Colour: black

Heavy wall shrink tube with adhesive

Especificaciones

Material	Polyofine	
Shrink temperature	> 125°C	
Continuous temperature	-55°C till +90°C	
Dielectric strength	≥ 15 kV/mm	ASTM D 2671-98
Volume resistivity	> 1 x 10 ¹² ohm cm	ASTM D 257-98
Heatshock (30 min/200°C)	No damage	ASTM D 2671-98
Tensile strength	≥ 12 Mpa	ASTM D 2671-98
Elongation at break	≥ 400%	ASTM D 2671-98
Longitudinal change	≤ 15%	ASTM D 2671-98
Waterabsorbtion	≤ 0,5%	ASTM D 570

Heavy wall shrink tube with adhesive

Productos

Art.nr.	Product Naam	Diámetro antes contracción (mm)	Diámetro después de la contracción (mm)	Espesor después de la contracción (mm)	Color	Unidad de embalaje
8420005	Heat shr. tube HWA/SK5 12-3/1000	12	3	2,5	azul claro	10 x 1000mm
8420015	Heat shr. tube HWA/SK5 20-6/1000	20	6	2,7	azul claro	10 x 1000mm
8420035	SK5 30-8/1000	30	8	4,0	azul claro	10 x 1000mm
8420050	SK5 40-13/1000	40	13	4,0	azul claro	10 x 1000mm
8420060	Heat shr. tube HWA/SK5 55-18/1000	55	18	4,1	azul claro	10 x 1000mm
8420070	Heat shr. tube HWA/SK5 69-20/1000	69	20	4,1	azul claro	10 x 1000mm
8420075	Heat shr. tube HWA/SK5 95-30/1000	95	30	4,1	azul claro	10 x 1000mm
8414100	Shrink tube HWA/SK5 125/40	125	40	4,0	azul claro	5 x 1200mm
8414105	Heat shr. tube HWA 130-36/1200	130	36	4,0	azul claro	5 x 1200mm
8414110	Heat shr. tube HWA/SK5 160-50/1200	160	50	4,0	azul claro	5 x 1200mm

Heavy wall shrink tube with adhesive