


# Heavy wall shrink tube with adhesive

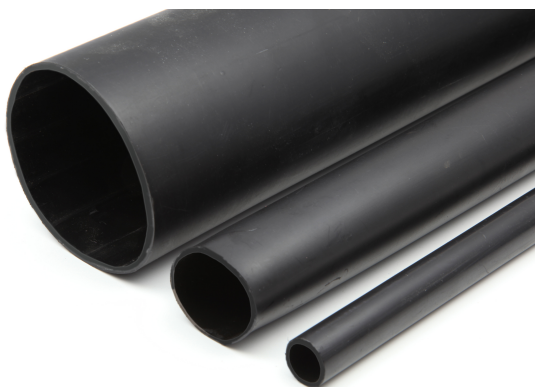

Cable joints and cable terminations  
Cables till 1kV  
Telecommunication  
Indoor / Outdoor underground, above ground, under water, in cable ducts

## Rasgos

- Polyolefine crosslinked
- Fast recovery
- Shrink temperature 70°C till 100°C
- Continuous temperature range from -55°C till +90°C
- Good resistance against UV and chemicals
- Corrosion resistant
- Flexible
- Cadmium free and halogen free
- Colour: black

# Heavy wall shrink tube with adhesive

## Especificaciones

Material	Polyofine	
Shrink temperature	> 125°C	
Continuous temperature	-55°C till +90°C	
Dielectric strength	≥ 15 kV/mm	ASTM D 2671-98
Volume resistivity	> 1 x 10 <sup>12</sup> ohm cm	ASTM D 257-98
Heatshock (30 min/200°C)	No damage	ASTM D 2671-98
Tensile strength	≥ 12 Mpa	ASTM D 2671-98
Elongation at break	≥ 400%	ASTM D 2671-98
Longitudinal change	≤ 15%	ASTM D 2671-98
Waterabsorbtion	≤ 0,5%	ASTM D 570

# Heavy wall shrink tube with adhesive

## Productos

Art.nr.	Product Naam	Diámetro antes contracción (mm)	Diámetro después de la contracción (mm)	Espesor después de la contracción (mm)	Color	Unidad de embalaje
8420005	Heat shr. tube HWA/SK5 12-3/1000	12	3	2,5	azul claro	10 x 1000mm
8420015	Heat shr. tube HWA/SK5 20-6/1000	20	6	2,7	azul claro	10 x 1000mm
8420035	SK5 30-8/1000	30	8	4,0	azul claro	10 x 1000mm
8420050	SK5 40-13/1000	40	13	4,0	azul claro	10 x 1000mm
8420060	Heat shr. tube HWA/SK5 55-18/1000	55	18	4,1	azul claro	10 x 1000mm
8420070	Heat shr. tube HWA/SK5 69-20/1000	69	20	4,1	azul claro	10 x 1000mm
8420075	Heat shr. tube HWA/SK5 95-30/1000	95	30	4,1	azul claro	10 x 1000mm
8414100	Shrink tube HWA/SK5 125/40	125	40	4,0	azul claro	5 x 1200mm
8414105	Heat shr. tube HWA 130-36/1200	130	36	4,0	azul claro	5 x 1200mm
8414110	Heat shr. tube HWA/SK5 160-50/1200	160	50	4,0	azul claro	5 x 1200mm

# Heavy wall shrink tube with adhesive