

Straight connection joint



Low voltage 0,6/1 (1,2) kV, Telecommunication and
Signalisation
Inside / outside underground, above ground,
underwater, in cable ducts


Rasgos

- Cable joint type tested according to: EN 50393:2006-11
- Resin type tested according to: IEC60455-3-8:2013
- Hydrolysis resistant polyurethane resin in transparant 2-component bag
- Strong transparant snaplock shells
- Fully waterproof, no leakage of liquid resin
- Distance spacers included (version 4x10mm² - 4x25mm²)
- Complete kit, sealing tape, sandpaper, and protective gloves inclusive
- Installation instruction with clear drawings
- Easy and quick installation
- Connectors and/or earthing kits available on request
- Other shell size dimensions available on request

Más información

[Download: Mixing instructions](#)

Straight connection joint

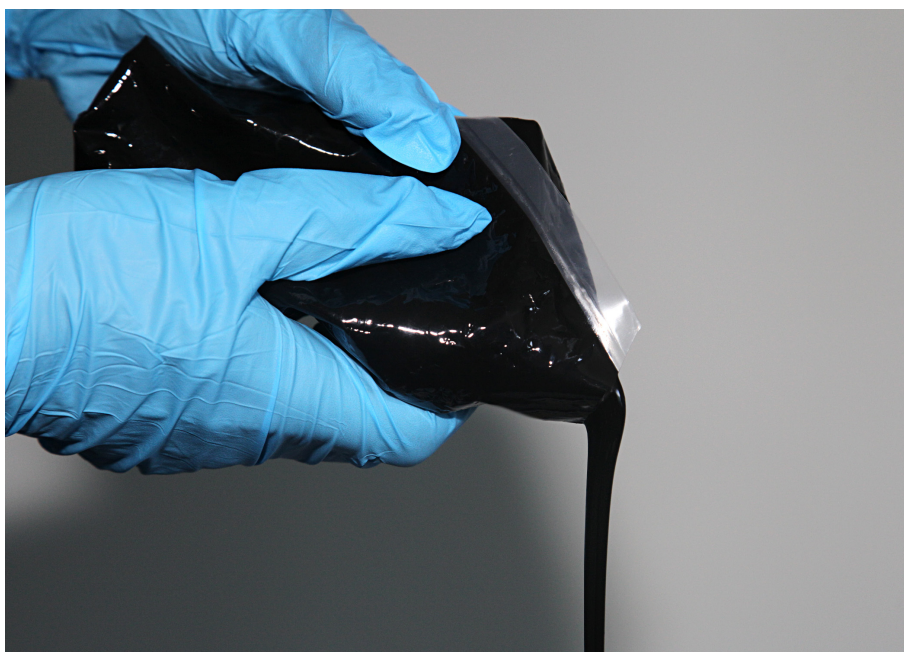

Straight connection joint

Productos

| Art.nr. | Product Naam | Diámetro del cable (mm) | Dimensiones (mm) | Unidad de embalaje |
|----------|---|-------------------------|------------------|--------------------|
| 80163 | Straight connection joint till 4x6mm ² | Ø 06 - 28 | L189 x Ø40 | per piece |
| 80164 | Straight connection joint till 4x16mm ² | Ø 12 - 32 | L250 x Ø50 | per piece |
| 80164B | Straight connection joint till 4x25mm ² | Ø 10 - 34 | L320 x Ø60 | per piece |
| 80165 | Straight connection joint till 4x50mm ² | Ø 26 - 53 | L355 x Ø72 | per piece |
| 8.000907 | Straight connection joint till 4x95mm ² | Ø 30 - 48 | L450 x Ø75 | per piece |
| 8.000908 | Straight connection joint till 4x150mm ² | Ø 32 - 68 | 530 x 132 | per piece |
| 8.000909 | Straight connection joint till 4x240mm ² | Ø 45 - 70 | L700 x Ø155 | per piece |