


Duct sealing system FiloSeal+HD is a solution for sealing larger heavy cables and pipes in ducts, bore holes or transit frames.

Upto 2 bar Pressure Resistance
100Kg pulling Force on the cables when sealed
10xd at 45°, with 1 bar pressure bending test

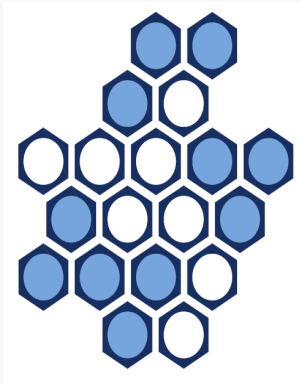

Rasgos

- Flexible, one component, adhesive and sealing compound in a cartridge - (310ml)
- High levels of Gas and Water tightness
- Excellent adhesion
- Shows Fire resistance properties
- Resistant against Water, Alkaline, Chemical agents
- Resistant to termites (Mastotermes Darwiniensis) Northern Australian termites
- Resistant to Rats
- Resistant to Hydrogen Sulphide / Methane and many other Gases (NedLab)
- Non corrosive
- Solvent free
- Shock absorbing
- Non toxic, neutral and almost odourless
- Also suitable for limiting the EX-zones during transitions (observe chemical resistance)
- Suitable for any shaped duct / bore hole / opening
- Quick and easy installation
- A complete kit
- Seals common materials (PVC, PILC)
- Suitable for renovations, can be installed retrospectively
- Over 25 years of operational experience

Especificaciones

Dichte	1.2 gr/cm ³	
Standvermögen	< 2mm	ISO 7390
Auszugsfestigkeit	1000 N	
Biegefestigkeit	10xd bei 45°	
Colour	rot-braun	
Hautbildung (23°C/55% r.F.)	± 15 Minuten	
Aushärtung	3 mm / 24 Stunden	
Härte	Shore A 30	DIN 53505
Reißdehnung	100%	DIN 53504
Zugfestigkeit	0.8 N/mm ²	DIN 53504
Dauerbetriebstemperatur	+5°C tot +40°C	
Temperaturbeständigkeit	-40°C tot +120°C	

Productos

Art.nr.	Product Naam	Diámetro de conducto mín.-máx. (mm)	Diámetro máximo del cable en el conducto (mm)	Unidad de embalaje
80204	FiloSeal+ HD 110mm	Ø 110 max.	Ø 80 max.	per set
80205	FiloSeal+ HD 160mm	Ø 160 max.	Ø 130 max.	per set