

## Taped resin injection joint




Universal application; the injection joints can be adjusted to any situation "on the spot", also for cable repairs.

Connection-, branch-off joints and cable end joints can be made with just a limited number of basic components.

# Taped resin injection joint

## Rasgos

- Only 6 basic components can make every type/size of joint
- Optimum flexibility, independent of size and type of connector
- Universally applicable, the Taped resin injection joint can be adapted to any situation, including repairs to damaged cable oversheets
- Suitable for complicated cable connections and cables running horizontally or bended
- The wrapping gauze is used to create sufficient insulation distance between the conducting parts within the injection joint
- Installation is just as quick as a cast resin joint, but with less preparation and you can close the ground right away
- Resin can be applied on live cables, It is not necessary to wait for the resin to cure.
- The resin is injected under pressure with the use of the injection pump
- As the resin is filled "under pressure", possible air will be driven out of the cable connection, thus allowing no spots where water or moisture can enter into the joint on the longer term
- Totally resistant against moisture, even when applied on wet cables.
- Clear visibility of filling process
- The strong mesh, in combination with the resin ensures a good mechanical protection over the entire length of the joint
- Environmental friendly and economical; the compact dimensions of injection joints ensure a minimal use of resin and materials
- Filoform produces and supplies all components in accordance with international standards and with the ISO 9001-2008 quality standard
- The Filoform injection joints are approved in accordance with the standard DIN EN 50393 (VDE 0278-393):2006-11.
- Total moisture resistance (HD 631-1), even when mounted on wet cables
- Low stock values
- Saving of space in your warehouse and in your service vans
- Always the correct materials available for all types of cable joints
- Minimal use of resin thanks to the compact dimensions

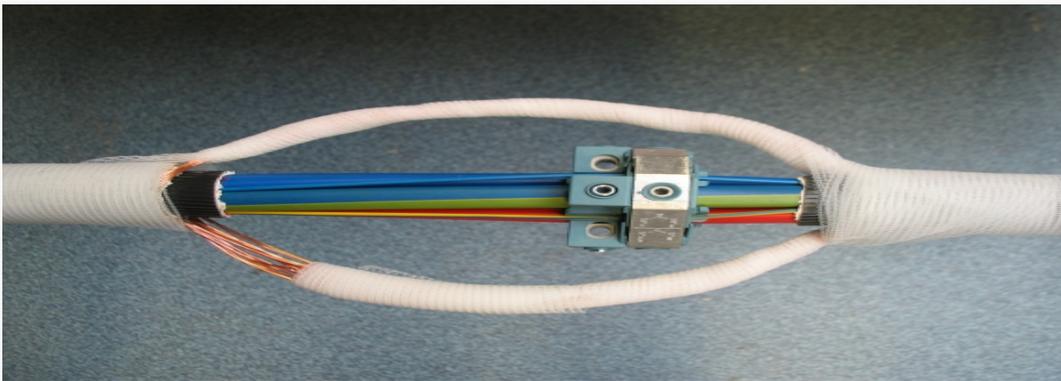

# Taped resin injection joint

## Productos

Art.nr.	Product Naam	Color	Contenido	Dimensiones	Unidad de embalaje
804606	Filofill P2600 184ml	negro	184ml		10 pcs/carton
804610	Filofill P2600 355ml	negro	355ml		10 pcs/carton
80136	Kabeline 1611 B-pack	rojo	197 gram		10 pcs/carton
80137	Kabeline 1611 C-pack	rojo	380 gram		10 pcs/carton
80477	Yellow gauze 38mm x 9m				100 pcs/carton
80482	Wikkelgauze flex 10cm x 3,5m				100 pcs/carton
80381	Injection nipple 6,1mm				10 pcs/bag
80535	Injection valve 6,1mm				10 pcs/bag
80370	Injection nipple 12,2mm				50 pcs/carton
80467A	Wrap-around tape 38mm x 20m transparent	transparente		38mm x 20m x 0,19mm	80 pcs/carton
80469A	Wrap-around tape 50mm x 10m transparent	transparente		50mm x 10m x 0,19mm	80 pcs/carton
80530	Branch-off seal universal				150 pcs/carton
80533	Separator strip 220x80mm				100 pcs/carton
80534	Core separator 22x8cm				100 pcs/carton

## Taped resin injection joint

80532	Core separator 22x16cm				50 pcs/carton
80397	Injection gun GN-E5 with ball bearing mechanism				per piece